




HGS (INDIA) LIMITED

HGS Geoseis Cable

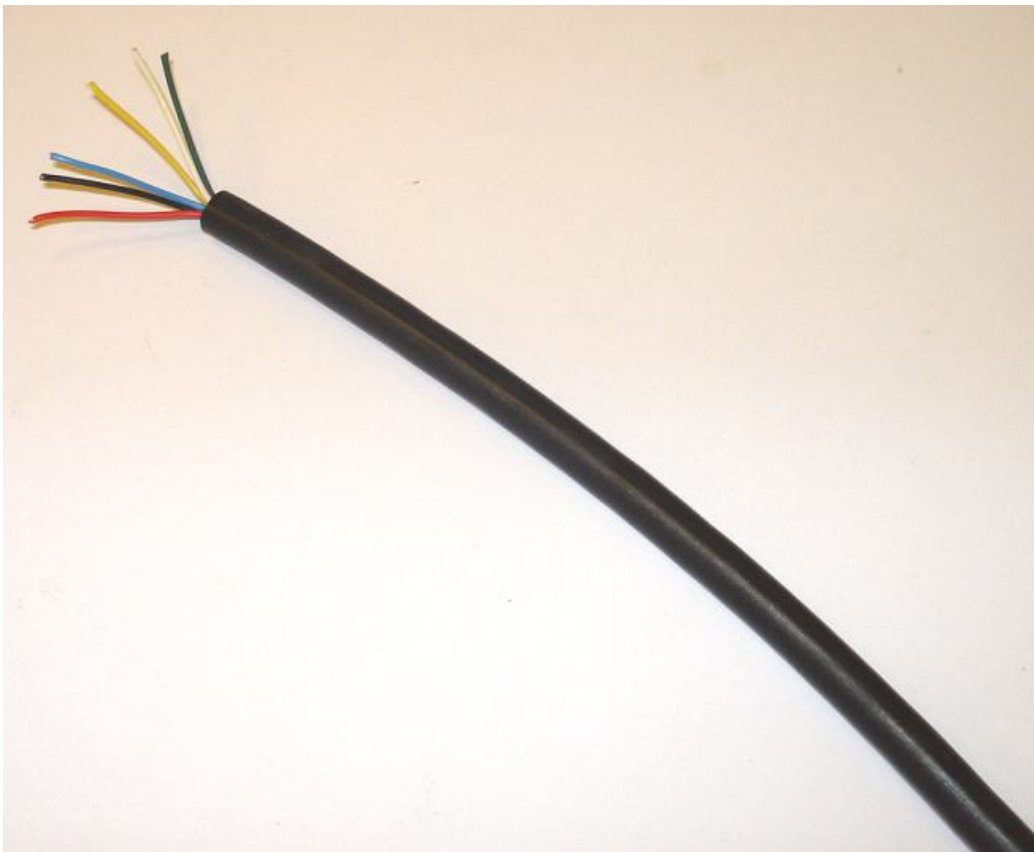


158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED

SCHEMATIC

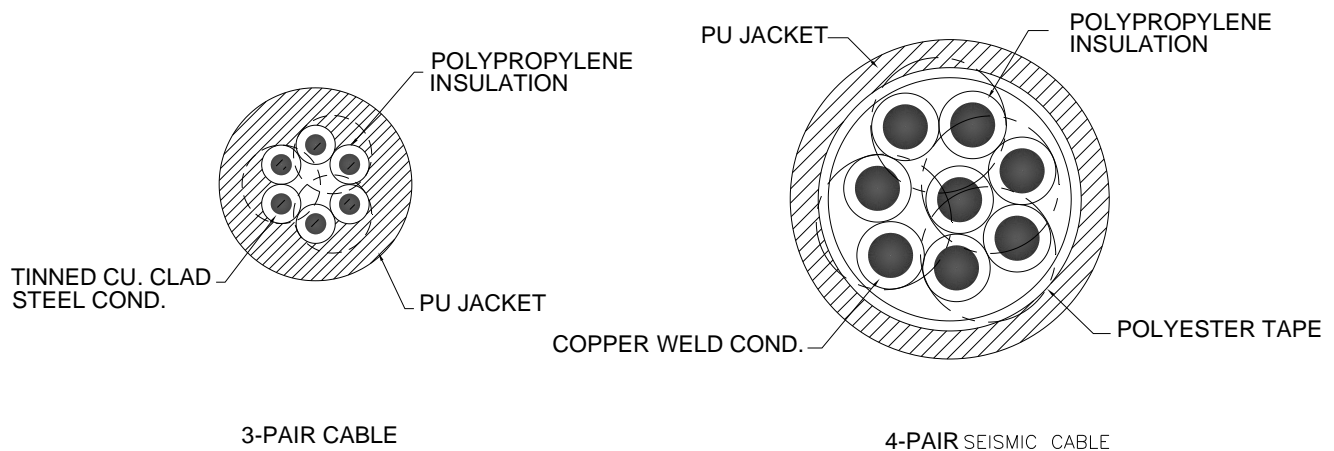

HGS Geoseis Cable

158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED

SPECIFICATIONS

HGS Geoseis Cable

- Three pair (four pair) analog signal geo-seis cable used with OPSEIS and I/O RSR systems.
- Uses tinned copper weld conductors for strength and flexibility and heavy duty polyurethane sheathing.
- Waterproof takeouts with customer specified geophone connectors.
- Excellent performance in rugged field conditions.
- Optional (Customer configuration): Polyester tape across core or central wire.
- Enough flexibility and strength for use in mobile field operations and frequent handling, transportation in form of coil etc.
- Operating Temperature Range: -20°C to +70°C