



HGS (INDIA) LIMITED

HGS RSR Cable




158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED

SCHEMATIC

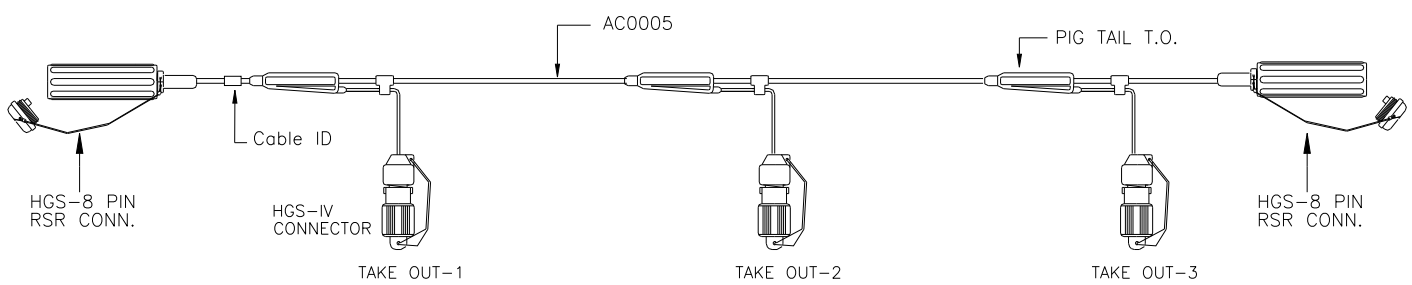

HGS RSR Cable

158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED

SPECIFICATIONS

HGS RSR Cable

- Three pair RSR cable used with I/O RSR systems.
- Inner jacket with PP.
- Outer dia: app. 9 mm
- Conductor resistance < 130 ohms / km.
- Uses copper weld conductors for strength and flexibility and heavy duty outer polyurethane sheathing.
- Waterproof takeouts with customer specified geophone connectors.
- Excellent performance in rugged field conditions.
- Enough flexibility and strength for use in mobile field operations and frequent handling, transportation in form of coil etc.
- Operating Temperature Range: -20°C to +70°C