



HGS (INDIA) LIMITED

RSR Battery Cable




158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED

SCHEMATIC

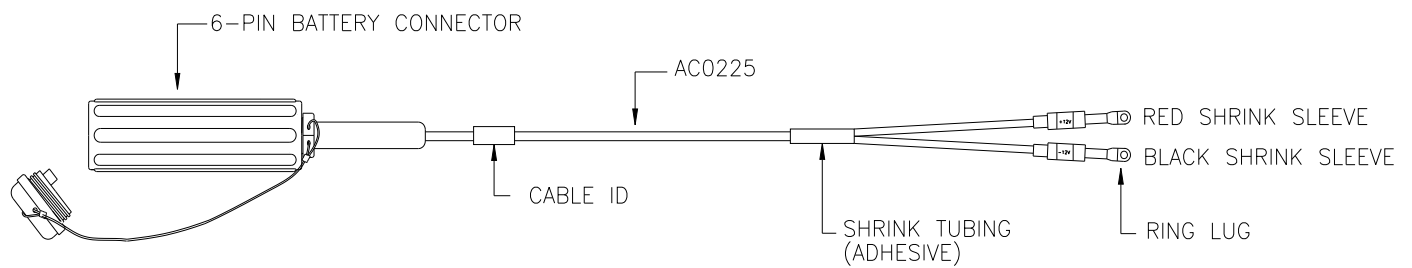

RSR Battery Cable

158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED

SPECIFICATIONS

RSR Battery Cable

- Two conductor battery cable with RSR Dynacon-6M connector on one end and ring lug termination on other end, used with ION Scorpion systems
- Heavy duty polyurethane sheathing
- Water block cable
- Outer dia : 9.14 ± 0.127 mm
- Conductor resistance < 8.5 ohms/km
- Break strength > 99 kgf
- Operating Temperature Range : -20°C to +70°C