



# HGS (INDIA) LIMITED

6 Contact Morpho, Dynacon, field installable connector




158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA  
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845  
Email: [sales@hgsindia.com](mailto:sales@hgsindia.com)



# HGS (INDIA) LIMITED

## SCHEMATIC

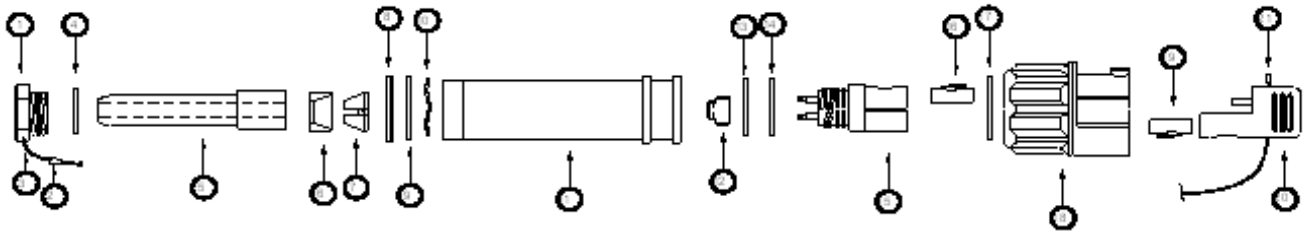

| SR. NO. | DESCRIPTION                 | QTY. |
|---------|-----------------------------|------|
| 1       | COMPRESSION NUT, BLACK      | 1    |
| 2       | FERRULE                     | 1    |
| 3       | INSULATED WIRE ROPE         | 30cm |
| 4       | BOOT WASHER                 | 1    |
| 5       | CABLE BOOT                  | 1    |
| 6       | WASHER COLLET               | 1    |
| 7       | COLLET                      | 1    |
| 8       | RETAINING RING              | 1    |
| 9       | ANTIFRICTION WASHER         | 1    |
| 10      | WAVE SPRING                 | 1    |
| 11      | BACK SHELL                  | 1    |
| 12      | ANCHOR KEVLAR               | 1    |
| 13      | O' RING                     | 1    |
| 14      | O' RING                     | 1    |
| 15      | CONTACT ASS Y. 6 PIN MORPHO | 1    |
| 16      | SEALING INSERT              | 1    |
| 17      | ANTIFRICTION WASHER         | 1    |
| 18      | LOCKING HANDLE              | 1    |
| 19      | SEALING INSERT              | 1    |
| 20      | DUST CAP                    | 1    |
| 21      | STOP SLEEVE                 | 1    |

6 Contact Morpho, Dynacon, field installable connector



# HGS (INDIA) LIMITED

## SPECIFICATION

### 6 Contact Morpho, Dynacon, field installable connector

- Ideal for using as a replacement for defective over moulded connectors on Scorpion land cables for effective field repairs.
- Connector with 3 sets of male & female contacts.
- Available for different cable sizes.
- Impact Resistant Material.
- Fitted with dust cap.
- Mating with a locking handle.
- Maximum strength in rugged field conditions.
- Water proof for marsh environment.
- Gold plated pins & sockets assure positive electrical connections.
- Two options available for stress member termination based on customer's preference; either stress wafer termination or potted Kevlar termination.
- Operating Temperature Range: -20°C to +70°C
- Pressure Rating: Up to 3 bar