



# HGS (INDIA) LIMITED



## Geode Cable Assembly



158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA  
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845  
Email: [sales@hgsindia.com](mailto:sales@hgsindia.com)




# HGS (INDIA) LIMITED



## SCHEMATIC

### Geode Cable Assembly

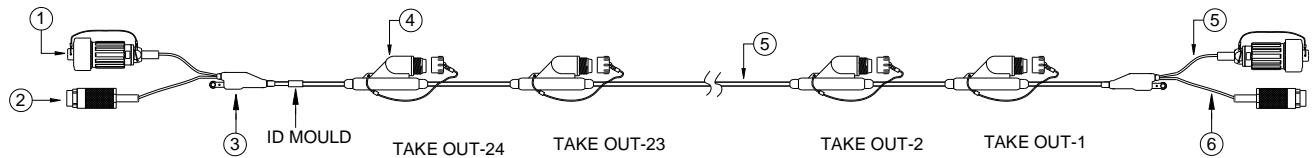

6	CAT5 CABLE W/O ANALOG 7.8MM 7X0.2MM TC F BLACK	As Reqd.
5	25 PAIR CABLE WITH COMM. PAIR, OD-13.5MM, BLACK	As Reqd.
4	5515F SF IN LINE T.O., WATER BLOCKED, BLUE	24 Nos.
3	CABLE ANCHOR SUB ASSY.	02 Nos.
2	HGS-10 PIN MALE CONNECTOR 8.3MM CABLE DIA	02 Nos.
1	HGS-61 PIN FEMALE CONNECTOR ASSY., 8.5MM CABLE	02 Nos.
SL. NO.	DESCRIPTION	QTY

158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA  
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845  
Email: sales@hgsindia.com



# HGS (INDIA) LIMITED



## SPECIFICATIONS

### Geode Cable Assembly

- Seismic cable for Geode DZ seismic system
- Water blocked 25 pair cable with communication pair
- Maximum strength for use in rugged field conditions. Enough flexibility and strength for use in mobile field operations and frequent handling, transportation in form of coil etc
- Break Strength > 600 lbs
- Outer Diameter: 13.5mm ± 0.20mm
- High impact resistant connector and takeout material
- Operating Temperature Range: -20°C to +70°C
- Waterproof up to 3 bar pressure