



HGS (INDIA) LIMITED

HGS CDP Cable




158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED

SCHEMATIC

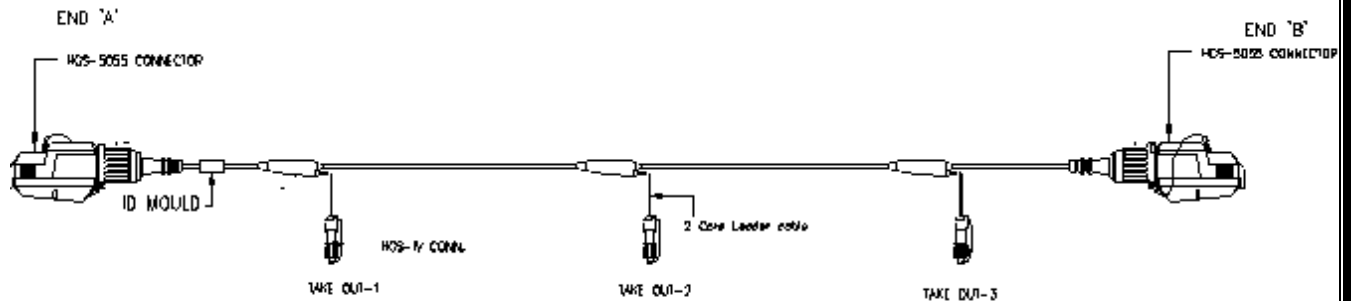

HGS CDP Cable

158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED

SPECIFICATIONS

HGS CDP Cable

- Pairs: 12 to 128 pairs.
- Conductor: 6 copper+1 steel.
- DC Resistance <290 ohms / km.
- Insulation Dia : 0.65 ± 0.04 mm
- Outer Dia : 5 mm to 16 mm
- Excellent flexibility.
- Cable Sheathing using finest urethanes.
- Break Strength: 80 to 500 kgf.
- Maximum strength in rugged field conditions.
- Operating Temperature Range: -20°C to +70°C

158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com