




HGS (INDIA) LIMITED




10 Pin Male Connector (For SARIS Cable)

SCHEMATIC

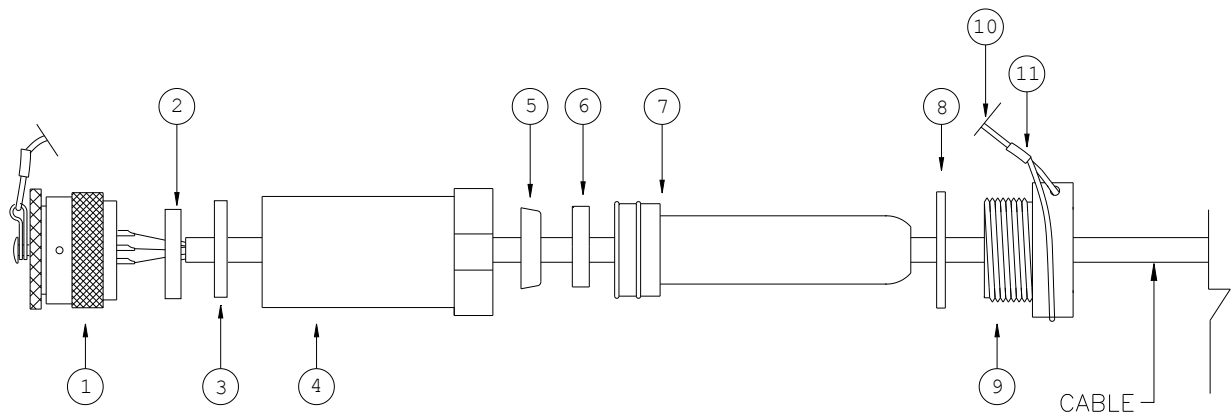

SR NO.	DESCRIPTION	QTY.
1	10 PIN M CONN. WITH DUST CAP	1
2	STRESS WAFER	1
3	QUADRING	1
4	CONNECTOR BACKSHELL	1
5	COLLET	1
6	COLLET WASHER	1
7	CABLE BOOT	1
8	BOOT WASHER	1
9	BACKSHELL NUT	1
10	INSULATED WIRE ROPE	30cm
11	FERRULE	1



VIEW FROM MATING SIDE

158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
 Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
 Email: sales@hgsindia.com




HGS (INDIA) LIMITED




10 Pin Female Connector (For SARIS Cable)

SCHEMATIC

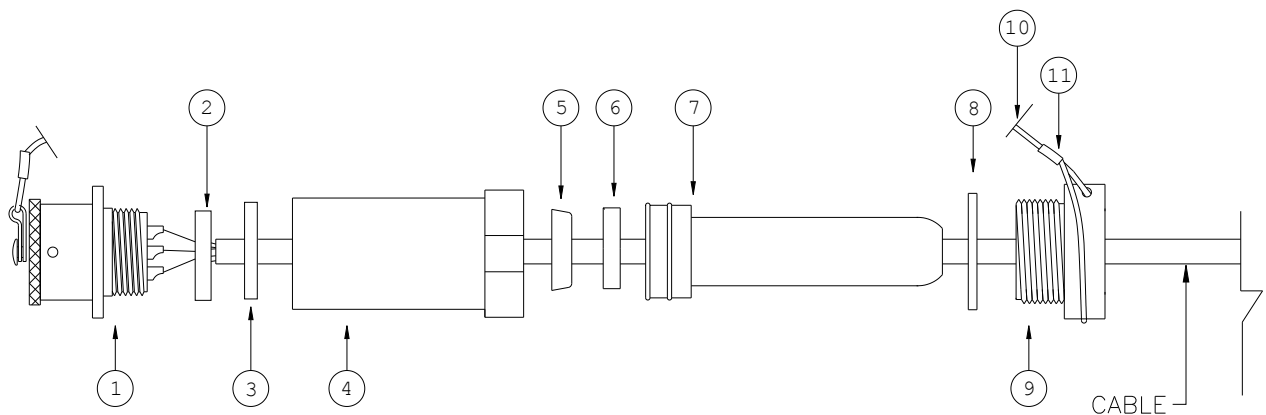

SR NO.	DESCRIPTION	QTY.
1	10 PIN F CONN. WITH DUST CAP	1
2	STRESS WAFER	1
3	QUADRING	1
4	CONNECTOR BACKSHELL	1
5	COLLET	1
6	COLLET WASHER	1
7	CABLE BOOT	1
8	BOOT WASHER	1
9	BACKSHELL NUT	1
10	INSULATED WIRE ROPE	30cm
11	FERRULE	1



VIEW FROM MATING SIDE



HGS (INDIA) LIMITED



SPECIFICATIONS

10 Pin Male & Female Connector (For SARIS Cable)

- Male and Female connectors for Saris Cable
- Cable Capacity: 6.5 to 9.5 mm OD
- Easily field repairable and water proof
- Cable entry kit prevents rotational twist to conductors inside connector
- Stress wafer to avoid stress on solder joints
- Metal body for increased strength and use in rugged field condition
- Fitted with dust cap
- Operating Temperature Range: -20°C to +70°C
- Pressure Rating: Up to 2 bar

158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com