




HGS (INDIA) LIMITED

HGS-IV Connector

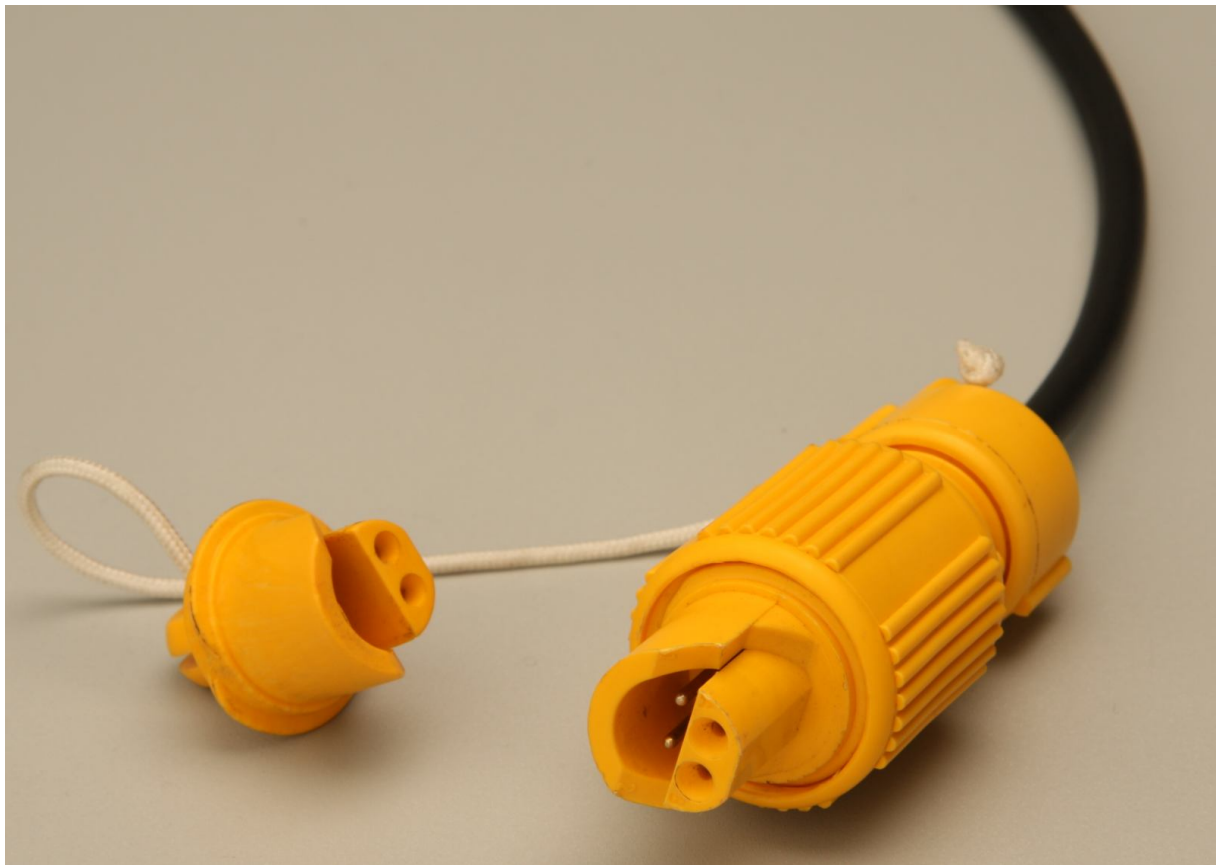


Plot No- 158, Sector- 4, IMT Manesar, Gurgaon, Haryana- 122050 (INDIA)
Tel: +91(0124) 4681800, Fax: +91(0124) 4681845
email:sales@hgsindia.com



HGS (INDIA) LIMITED

SCHEMATIC

HGS-IV CONNECTOR ASSY.

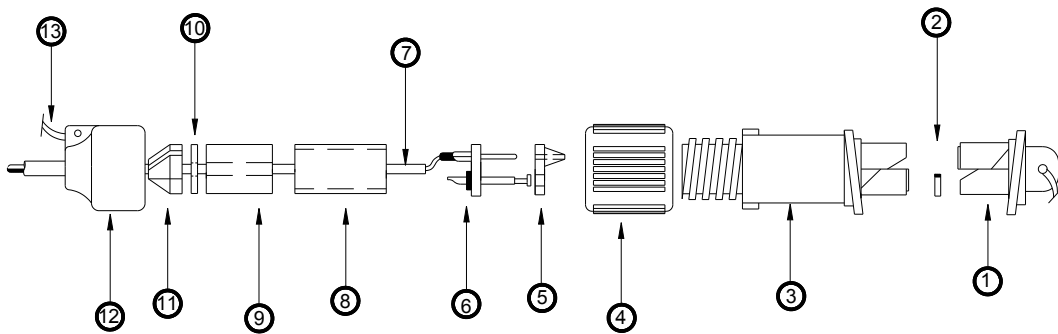

SR. NO.	DESCRIPTION	QTY.
1	DUST CAP	1
2	D-WASHER	1
3	CONNECTOR BODY	1
4	COUPLING NUT	1
5	CONICAL RUBBER WASHER	1
6	PIN RETAINER SUB ASSY.	1
7	LEADER CABLE	as reqd.
8	SPACER	1
9	RUBBER GLAND	1
10	ALUMINIUM WASHER	1
11	COLLET	1
12	GLAND NUT	1
13	PARACHUTE CORD	1
14	INSULATED WIRE ROPE	25cm

HGS-IV Connector

Plot No- 158, Sector- 4, IMT Manesar, Gurgaon, Haryana- 122050 (INDIA)
Tel: +91(0124) 4681800, Fax: +91(0124) 4681845
email:sales@hgsindia.com



HGS (INDIA) LIMITED

SPECIFICATIONS

HGS-IV Connector

- Fully compatible with Amphib IV connector.
- Suitable for 4.57, 5.33, 6.35 mm cable.
- Threaded coupling ring assures mating with its counterpart.
- Water proof for marsh environment.
- Maximum strength in rugged field condition.
- Fitted with dust caps.
- Suitable over a wide temperature range and for almost any environmental condition.
- Gold plated pins for reduced corrosion and less contact resistance.
- Impact modified polymers used in moulding to improve break strength of connector components and retain dimensional rigidity when tightened and for prevention of leakage.
- Operating Temperature Range: -20°C to +70°C
- Pressure Rating: Up to 4.5 bar

Cable Diameter	Silver Plated (Part No.)	Gold Plated (Part No.)
4.57 mm	AJ000035	AJ000024
5.33 mm	AJ000176	AJ000025
6.35 mm	AJ000049	AJ000084

Plot No- 158, Sector- 4, IMT Manesar, Gurgaon, Haryana- 122050 (INDIA)

Tel: +91(0124) 4681800, Fax: +91(0124) 4681845

email:sales@hgsindia.com