



HGS (INDIA) LIMITED



428XL WPSR DSU 1-4 LINK CABLE



158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com




HGS (INDIA) LIMITED



SCHEMATIC

428XL WPSR DSU 1-4 LINK CABLE

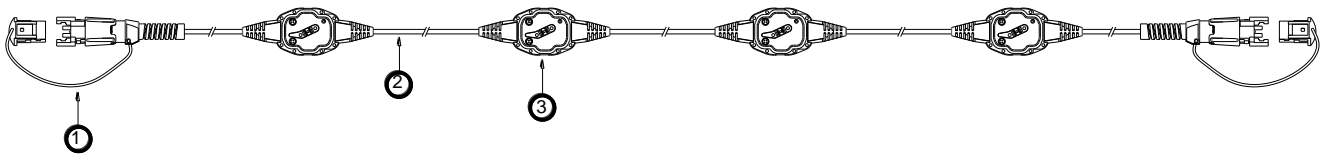

3	428 DSU3, WPSR TAKE OUT	SJ000465
2	4 COND. FSC LINE CABLE WPSR, OD-9.5MM, ORANGE	AC000349
1	WPSR END CONNECTOR ASSEMBLY	AJ000328
SL. NO.	DESCRIPTION	P/N

158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED



SPECIFICATIONS

Parameters	Value
• Field conditions	Wet
• Conductor arrangement	1 quad
• Conductor type	Stranded
• Water blocked	Yes
• Max. water depth	15M or more
• Diameter	9.5mm
• Tensile strength (Nude Cable)	>300daN
• Tensile strength (with connector)	>250daN
• Stress member	Aramid Braid/Kevlar
• Weight	95Kg/Km
• Double Jacket	Water proof double jacket
• Operating Temperature	-40°C to 70°C
• Storage Temperature	-40°C to 85°C
• Data transfer Rate	16 mbps

Compatibility:

WPSR cables compatible with Digital Sensor Unit (DSU) 3, 428XL LAUL & 428XL LAUX