



HGS (INDIA) LIMITED



RLS Switch Cable




158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED



RLS Switch Cable

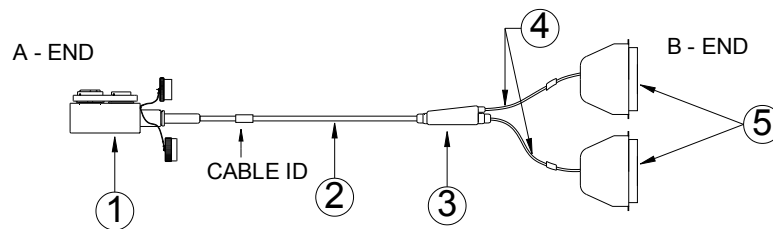

| | | |
|---------|--|----------|
| 5 | 50 PIN CONN. | 02 Nos. |
| 4 | 25 PAIR SHALLOW REFRACTION CABLE, 8.5MM, BLACK | as Reqd. |
| 3 | Y JUNCTION | 01 No. |
| 2 | 52 PAIR SEISMIC CABLE, 12.2MM, BLACK | as Reqd. |
| 1 | HGS-24-122 PIN M/F CONN. ASSY., 12.5MM CABLE | 01 No. |
| SL. NO. | DESCRIPTION | QTY |

158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED



SPECIFICATIONS

RLS Switch Cable

- 52 pair shallow refraction cable with HGS-24-122 pin connector at one end and two 50 pin connectors on 25 pair shallow refraction cable at the other end.
- Maximum strength for use in rugged field conditions. Enough flexibility and strength for use in mobile field operations and frequent handling, transportation in form of coil etc
- Break Strength > 120 Kgf
- Outer Diameter: 12.2mm \pm 0.20mm for 52 pair cable
: 8.5mm \pm 0.20mm for 25 pair cable
- Metal connector body
- Operating Temperature Range: -20°C to +70°C

158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com