



HGS (INDIA) LIMITED



HGS-5515 Male & Female Push Fit Connectors



158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com




HGS (INDIA) LIMITED



SCHEMATIC

HGS-5515 Male Push Fit Connectors

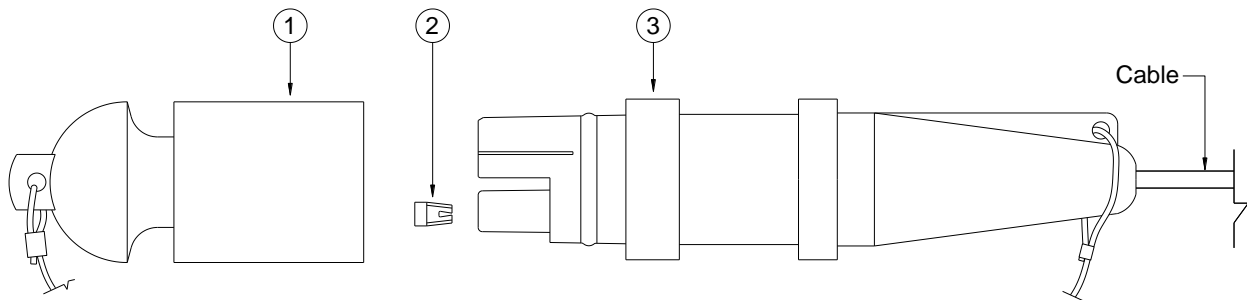

3	CONNECTOR BODY SUB ASSY.	01 No.
2	MILL-MAX #08	01 No.
1	DUST CAP WITH WIRE ROPE & FERRULE	01 No.
S. NO.	DESCRIPTION	QTY



HGS (INDIA) LIMITED



SPECIFICATIONS

HGS-5515 Male Push Fit Connectors

- Connector with 1 set of male & female contacts.
- Impact Resistant Material. Can be provided for cold weather use.
- Moulded on 4.57, 5.33 or 6.35 mm cable.
- Water proof for marsh environment.
- Gold plated pins & sockets assure positive electrical connections.
- Push-pull fit.
- Maximum strength in rugged field condition.
- Fitted with female dust cap.
- Specific configuration to customer specifications.
- Operating Temperature Range: -20°C to +70°C
- Pressure Rating: Up to 3 bar.




HGS (INDIA) LIMITED



SCHEMATIC

HGS-5515 Female Push Fit Connectors

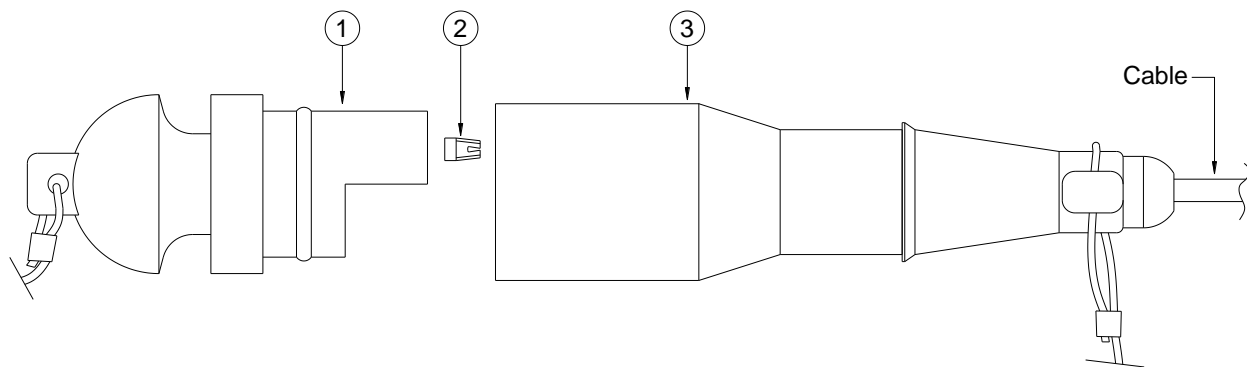

3	CONNECTOR BODY SUB ASSY.	01 No.
2	MILL-MAX #08	01 No.
1	DUST CAP WITH WIRE ROPE & FERRULE	01 No.
S. NO.	DESCRIPTION	QTY



HGS (INDIA) LIMITED



SPECIFICATIONS

HGS-5515 Female Push Fit Connectors

- Connector with 1 set of male & female contacts.
- Impact Resistant Material. Can be provided for cold weather use.
- Moulded on 4.57, 5.33 or 6.35 mm cable.
- Fitted with male dust cap.
- Push-pull fit.
- Maximum strength in rugged field conditions.
- Water proof for marsh environment.
- Gold plated pins & sockets assure positive electrical connections.
- Specific configuration to customer specifications.
- Operating Temperature Range: -20°C to +70°C.
- Pressure Rating: Up to 3 bar

Version 1.1