



HGS (INDIA) LIMITED



END CONNECTOR FOR WPSR/STPL CABLE




158, Sector-4, IMT Manesar, Gurugram-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED



SCHEMATIC END CONNECTOR FOR WPSR/STPL CABLE

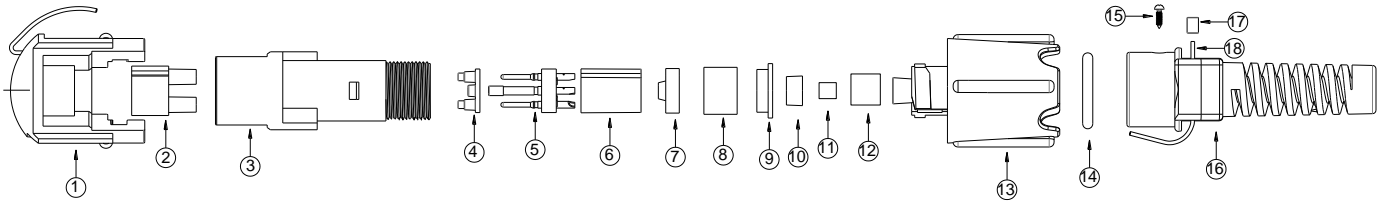

18	INSULATED WIRE ROPE, 100 LBS, DIA-1.5MM	28cm
17	STOP SLEEVE, 6 CONTACT MORPHO	2
16	CABLE BOOT THREADED, WPSR CONN.	1
15	PAN HEAD SELF TAPING SCREW, M2.5x8mm LONG	1
14	O-RING, ID 22.5x4.1MM, WPSR CONN.	1
13	COUPLING RING, WPSR CONN.	1
12	CABLE ANCHOR OUTER PART, WPSR CONN.	1
11	CABLE ANCHOR INNER PART, WPSR T.O.	1
10	RUBBER GLAND 1, WPSR CONN.	1
9	STOPPER, WPSR CONN.	1
8	RUBBER GLAND 2, WPSR CONN.	1
7	WIRE RETAINER, WPSR Conn.	1
6	SPACER, WPSR CONN.	1
5	PIN RETAINER SUB ASSY., WPSR CONN.	1
4	CONICAL WASHER, WPSR CONN.	1
3	CONNECTOR BODY, WPSR CONN.	1
2	SEAL DUST CAP, WPSR CONN.	1
1	DUST CAP, WPSR CONN.	1
SL NO.	DESCRIPTION	QTY.



HGS (INDIA) LIMITED



SPECIFICATIONS

END CONNECTOR FOR WPSR/STPL CABLE

- End connector for WPSR 428xl FDU/DSU cable and 408 STPL cable
- 4 gold plated pins for better connectivity
- Cable Capacity – 6.5 to 9.5 mm OD.
- Easily field repairable and water proof.
- High Impact Resistant Thermoplastic.
- Cable entry kit prevents rotational twist to conductors in housing.
- Stress wafer/Cable anchor to avoid stress on solder joints.
- Maximum strength in rugged field condition.
- Fitted with dust cap.
- Operating Temperature Range: -20°C to +70°C
- Pressure Rating: Up to 3 bar

Version 1.1