



HGS (INDIA) LIMITED



Resistivity Cable



158, Sector-4, IMT Manesar, Gurugram-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com




HGS (INDIA) LIMITED



SCHEMATIC

Resistivity Cable

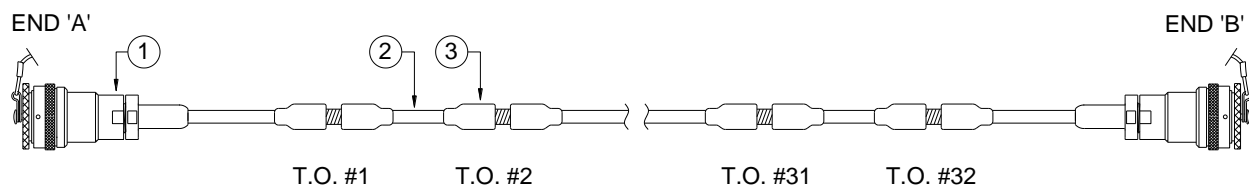

3	STEEL TUBE T.O. MOULDED FOR WIDE CLIP	32 Nos.
2	36 CONDUCTOR RESISTIVITY CABLE, YELLOW	As Req.
1	HGS-32 PIN M CONN. ASSY.	02 Nos.
S. NO.	DESCRIPTION	QTY



HGS (INDIA) LIMITED



SPECIFICATIONS

Resistivity Cable

- Wide range of customer specified resistivity cables.
- Preferred for groundwater & mineral exploration.
- Six copper and one steel wire for conductors.
- Uses patented stainless steel 20mm waterproof takeouts.
- DC resistance < 290 ohms / km @ 20 C.
- Maximum OD: 8.0 mm.
- Break Strength > 90 kgf.
- Cable made as per customized requirements.
- Enough flexibility and strength for use in mobile field operations and frequent handling, transportation in form of coil etc.
- Excellent performance in rugged field conditions.
- Operating Temperature Range: -20°C to +70°C.

Version 1.1