



HGS (INDIA) LIMITED



Shooting Trigger Wire




158, Sector-4, IMT Manesar, Gurugram-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED



SCHEMATIC Shooting Trigger Wire

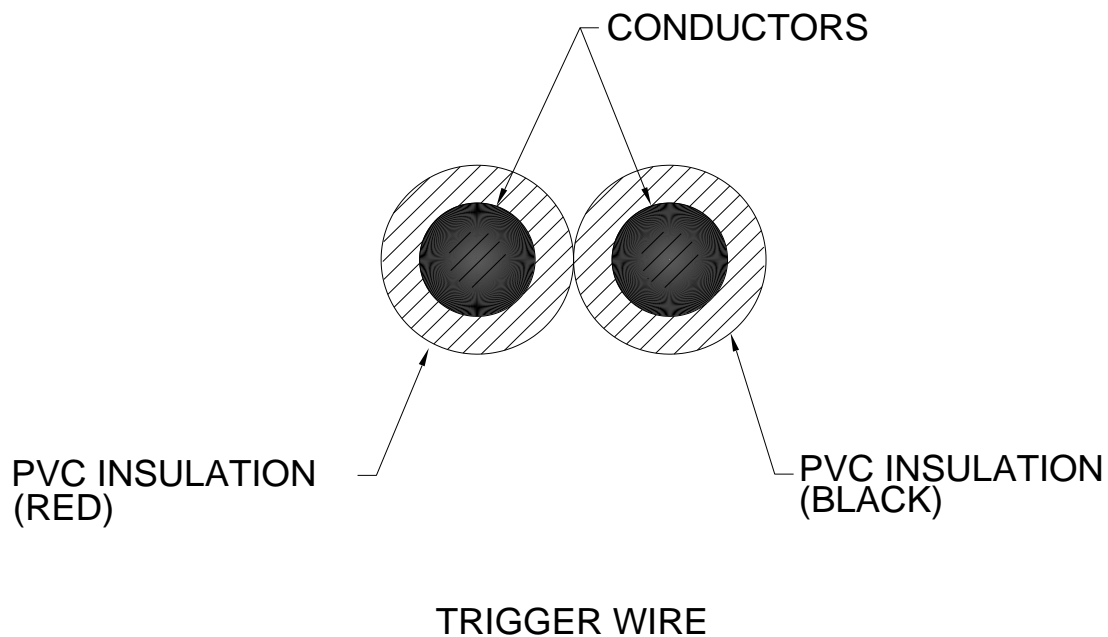



HGS (INDIA) LIMITED



SPECIFICATIONS

Shooting Trigger Wire

- Control cable assemblies of customer specified lengths and end terminations available
- Twin twisted wire.
- Bare copper conductors to have low resistance.
- Overall conductor resistance < 26 ohms / km @ 20 C.
- PVC insulation.
- Insulation concentricity important for longevity.
- Operating temperature 0 to 60 C.
- Customer specified insulation colour.
- Enough flexibility and strength for use in mobile field operations and frequent handling, transportation in form of coil etc.
- Operating Temperature Range: -20°C to +70°C

Version 1.1