



## HGS (INDIA) LIMITED



### HG-6 Omni-directional Geophone Element



Based on the technology transfer for manufacturing the SM<sup>®</sup> range of geophones from Sensor<sup>®</sup> Nederland BV, HGS (India) Limited (erstwhile Geosource India Limited) offers the HG-6 geophone which is a long coil travel geophone based on the HG-4 design. The HG-6 Omni-directional geophone has been specially designed for non-gimballed 3C applications, in particular Ocean Bottom node and Down-hole 4D/4C applications where high repeatability and reliability are key performance characteristics

A variety of 1-C and 3-C waterproof land cases can accommodate the HG-6 geophone.

#### **Features:**





- Design adapted from popular omni-directional geophone used extensively in industrial applications
- High sensitivity version available ( 80V/m/s)
- Rugged construction with precious-metal contacts
- Design based on proven Sensor<sup>®</sup> rotating coil family of geophones

**Specifications: HG-6 14Hz Omni-tilt Geophone**

<b>Frequency</b>	<b>Value</b>	<b>Value</b>
Natural frequency	14 Hz	14 Hz
Tolerance	±7%	±7%
Maximum tilt angle for specified fn	360°	360°
<b>Distortion</b>		
Distortion with 17.78 mm/s p.p. coil-to-case velocity	<0.6%	<0.6%
Distortion measurement frequency	14 Hz	14 Hz
<b>Damping</b>		
Open circuit	0.180	0.185
Tolerance (O.C.)	+10 / -5%	+10 / -5%
Shunt for 0.6 damping	634 Ω	5100 Ω
Shunt for 0.7 damping	442 Ω	3400 Ω
<b>Resistance</b>		
Standard coil resistance	375 Ω	3500 Ω
Tolerance	±5%	±5%
<b>Sensitivity</b>		
Open - circuit Sensitivity	28.8 V/m/s	80.0 V/m/s
Tolerance	+5 / -10%	+5 / -10%
$R_t B_c f_n$	5950 ΩHz	49931 ΩHz
Typical spurious frequency	190 Hz	190 Hz
Moving mass	11.1 g	10.2 g
Coil excursion p.p .	0.5 mm	0.5 mm
<b>Physical Characteristics</b>		
Diameter	25.4 mm	25.4 mm
Height	36 mm	36 mm
Weight	81 g	81 g
Operating temperature range	-40°C to 100°C	-40°C to 100°C
Working position	Omni-tilt	
Polarity	Positive indicated by raised dot adjacent to positive terminal	
<b>Warranty Period*</b>	2 years	2 years

\* Warranty excludes damage caused by high voltage and physical damage to the element case.  
 All parameters are specified at +20°C in the working position unless stated otherwise.

## Geophone Response Curve and Phase Lag

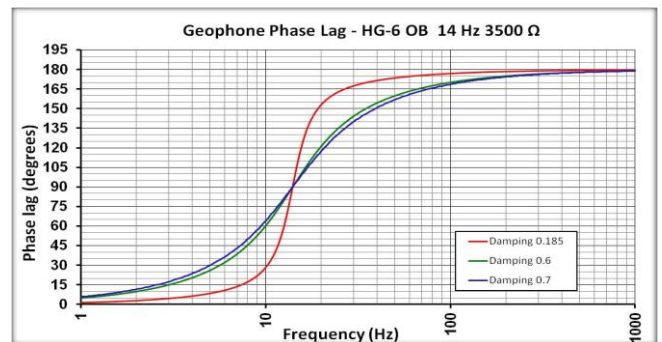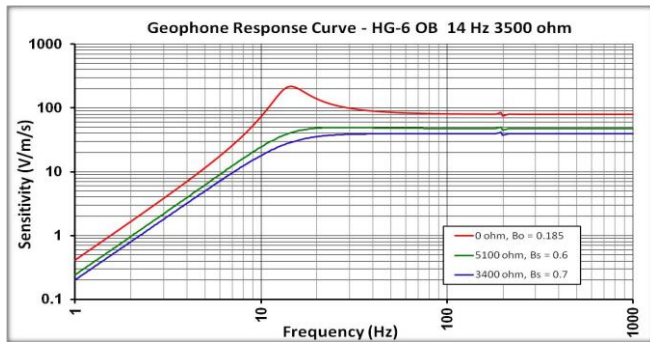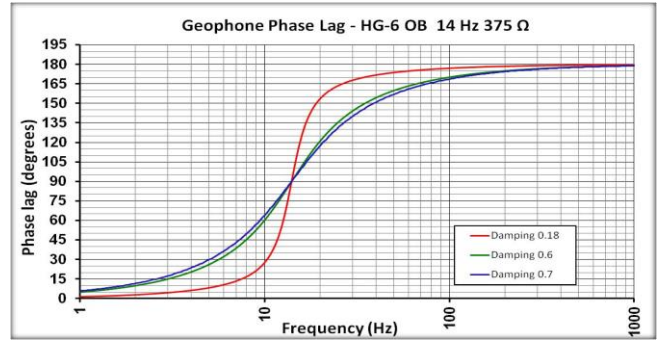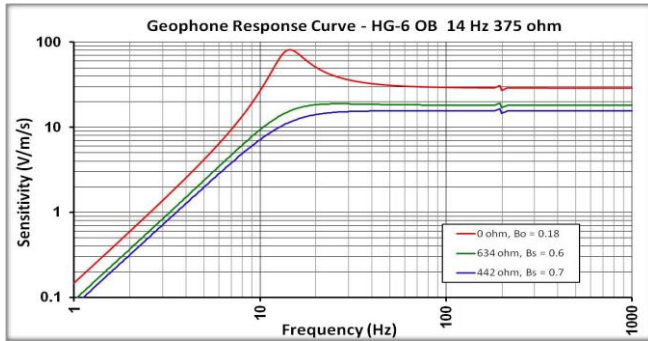

### Ordering information

Description	Part No.
HG-6 OB 14 Hz 375 Ω	SG000079
HG-6 OB 14 Hz 3500 Ω	SG000104

Version 1.2

#### India

HGS (India) Ltd  
 Tel : +91-11-46066604  
 Fax : +91-11-24333772  
 Website : [www.hgsindia.com](http://www.hgsindia.com)

#### The Netherlands

HGS Products B.V.  
 Tel : +31 708200820  
 Fax : +31 708200828  
 Website : [www.hgsproducts.nl](http://www.hgsproducts.nl)