



# HGS (INDIA) LIMITED

## HGS 1BP-Male & Female Land Connectors




158, Sector-4, IMT Manesar, Gurugram-122050 Haryana INDIA  
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845  
Email: [sales@hgsindia.com](mailto:sales@hgsindia.com)



# HGS (INDIA) LIMITED

## SCHEMATIC

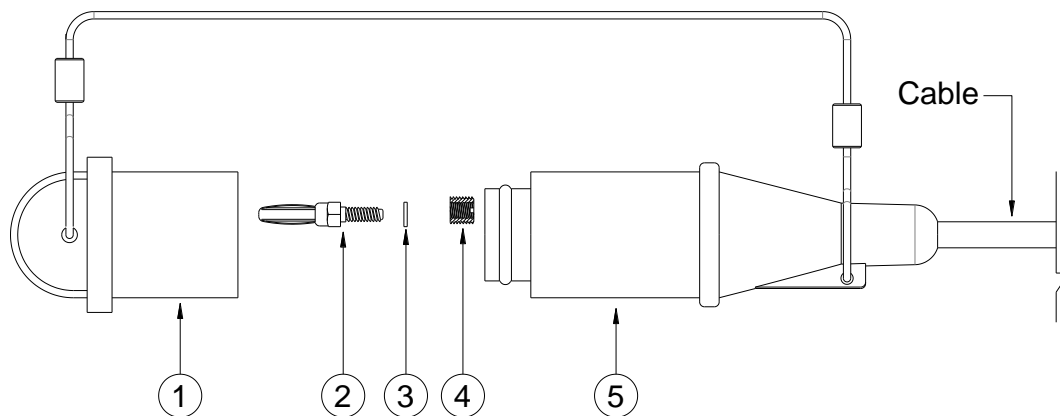

5	CONNECTOR BODY SUB ASSY.	01 No.
4	INSERT REMOVABLE	01 No.
3	SPRING WASHER	01 No.
2	BANANA PLUG	01 No.
1	DUST CAP WITH WIRE ROPE & FERRULE	01 No.
S. NO.	DESCRIPTION	QTY

## HGS 1BP-Male Land Connector



# HGS (INDIA) LIMITED


## SPECIFICATIONS

### HGS 1BP-Male Land Connector

- Compatible with Kooter style connectors.
- Connector with 1 set of male (banana) & female contacts.
- Replaceable male terminal.
- UV stabilised material.
- Compatible with 4.57, 5.33 or 6.35 diameter cable.
- Attached with female dust cap.
- Push-pull fit.
- Maximum strength in rugged field conditions.
- Suitable over a wide temperature range.
- Specific configuration to customer specifications.
- Operating temperature range: -20°C to +70°C (Standard version)  
-40°C to +70°C (Arctic version)
- Pressure Rating: Up to 1 bar.



## SCHEMATIC

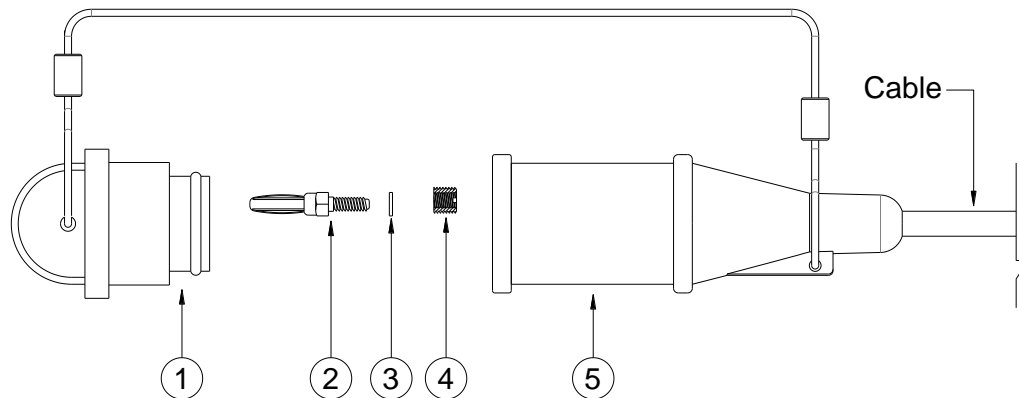

5	CONNECTOR BODY SUB ASSY.	01 No.
4	INSERT REMOVABLE	01 No.
3	SPRING WASHER	01 No.
2	BANANA PLUG	01 No.
1	DUST CAP WITH WIRE ROPE & FERRULE	01 No.
S. NO.	DESCRIPTION	QTY

### HGS 1BP-Female Land Connector



# HGS (INDIA) LIMITED

## SPECIFICATIONS

### HGS 1BP-Female Land Connector

- Compatible with Kooter style connectors.
- Connector with 1 set of male (banana) & female contacts.
- Replaceable male terminal.
- UV stabilized material.
- Compatible with 4.57, 5.33 or 6.35 diameter cable.
- Attached with male dust cap.
- Push-pull fit.
- Maximum strength in rugged field conditions.
- Suitable over a wide temperature range.
- Specific configuration to customer specifications.
- Operating temperature range: -20°C to +70°C (Standard version)  
-40°C to +70°C (Arctic version)
- Pressure Rating: Up to 1 bar.

Version 1.1