



# HGS (INDIA) LIMITED




## 408 STPL HALF LINK CABLE



## SCHEMATIC

### 408 STPL HALF LINK CABLE

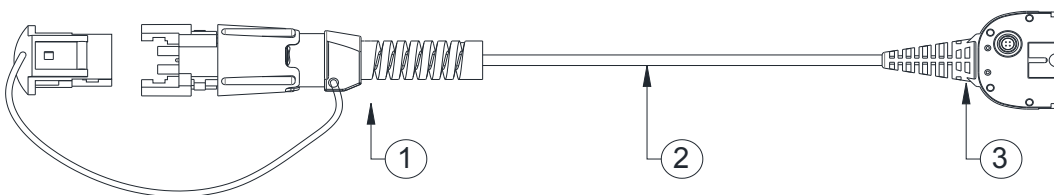

3	408 TAKE OUT, STPL CABLE	SJ000535
2	4 COND. STPL CABLE, OD-6.5MM, ORANGE	AC000304
1	END CONNECTOR ASSEMBLY, 6.5MM CABLE	AJ000376
SL. NO.	DESCRIPTION	P/N

158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA  
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845  
Email: sales@hgsindia.com




# HGS (INDIA) LIMITED



## SCHEMATIC


### 408 STPL MIDDLE SECTION CABLE

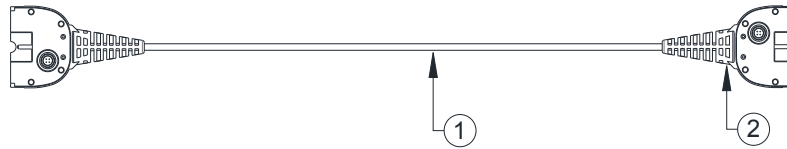

2	408 TAKE OUT, STPL CABLE	SJ000535
1	4 COND. STPL CABLE, OD-6.5MM, ORANGE	AC000304
SL. NO.	DESCRIPTION	P/N

## SCHEMATIC

### 408 STPL CABLE

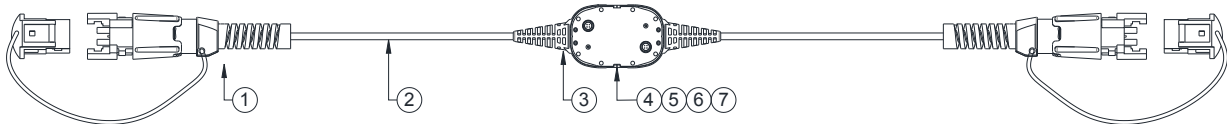

7	O-RING, ID 14.2x1.85MM	CE001257
6	MOUNTING PLATE, AL., 408 STPL T.O	CE001256
5	EARTHING CLAMP, 408 STPL T.O	CE001255
4	GROUNDING NUT, 408 STPL T.O	CE001254
3	408 TAKE OUT, STPL CABLE	SJ000535
2	4 COND. STPL CABLE, OD-6.5MM, ORANGE	AC000304
1	END CONNECTOR ASSEMBLY, 6.5MM CABLE	AJ000376
SL. NO.	DESCRIPTION	P/N



# HGS (INDIA) LIMITED



## SPECIFICATIONS

Parameters	Value
• Field conditions	Dry
• Conductor arrangement	1 quad
• Conductor type	Stranded
• Water blocked	No
• Max. water depth	Rainy
• Diameter	6.5mm
• Tensile strength (Nude Cable)	100daN
• Tensile strength (with connector)	70daN
• Stress member	Kevlar
• Weight	47Kg/Km
• Double Jacket	No
• Operating Temperature	-40°C to 70°C
• Storage Temperature	-40°C to 80°C