



HGS (INDIA) LIMITED

HGS-5515 Male & Female Marine Screw Fit Connectors




Plot No- 158, Sector- 4, IMT Manesar, Gurgaon, Haryana- 122050 (INDIA)
Tel: +91(0124) 4681800, Fax: +91(0124) 4681845
email:sales@hgsindia.com




HGS (INDIA) LIMITED

SCHEMATIC

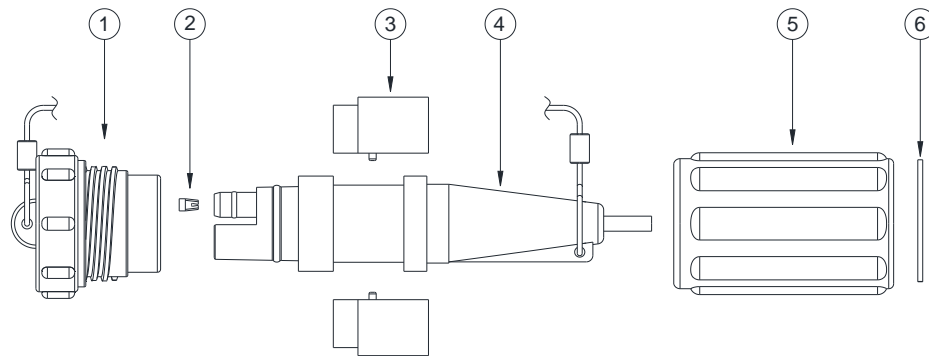

6	CIRCLIP	01No.
5	COUPLING RING	01No.
4	CONN. BODY SUB ASSY.	01No.
3	STOPPER	02Nos.
2	MIL MAX CONTACT #08	01No.
1	DUST CAP SUB ASSY. WITH INSU. WIRE ROPE & CRIMP SLEEVE	01No.
S. NO.	DESCRIPTION	QTY.

HGS 5515M Marine SF Conn.



HGS-5515 Male Marine Screw Fit Connector

Plot No- 158, Sector- 4, IMT Manesar, Gurgaon, Haryana- 122050 (INDIA)
 Tel: +91(0124) 4681800, Fax: +91(0124) 4681845
 email:sales@hgsindia.com



HGS (INDIA) LIMITED

SPECIFICATIONS


HGS-5515 Male Marine Screw Fit Connector

- Impact Resistant Material
- Moulded on 4.57, 5.33 or 6.35 mm cable
- Male end connector with coupling ring assures mating with its counterpart
- Water proof for marsh environment
- Gold plated pins & sockets assure positive electrical connections
- Screw fit mating
- Maximum strength in rugged field condition
- Fitted with dust cap
- Operating Temperature Range: -20°C to +70°C
- Water Pressure Rating: Up to 5 bar



HGS (INDIA) LIMITED

SCHEMATIC

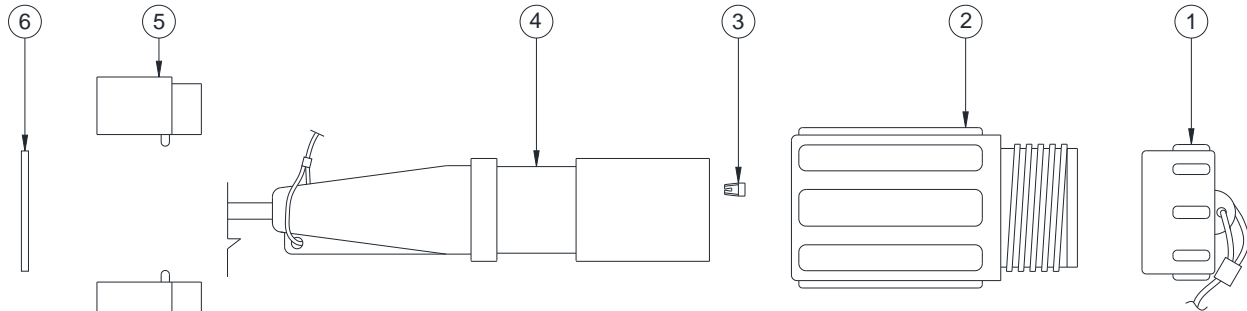

6	CIRCLIP	01No.
5	STOPPER	02Nos.
4	CONN. BODY SUB ASSY.	01No.
3	MIL MAX CONTACT #08	01No.
2	COUPLING RING	01No.
1	DUST CAP SUB ASSY. WITH INSU. WIRE ROPE & CRIMP SLEEVE	01No.
S. NO.	DESCRIPTION	QTY.

HGS 5515F Marine
SF Conn.



HGS-5515 Female Marine Screw Fit Connector

Plot No- 158, Sector- 4, IMT Manesar, Gurgaon, Haryana- 122050 (INDIA)
Tel: +91(0124) 4681800, Fax: +91(0124) 4681845
email:sales@hgsindia.com



HGS (INDIA) LIMITED

SPECIFICATIONS

HGS-5515 Female Marine Screw Fit Connector

- Impact Resistant Material
- Moulded on 4.57, 5.33 or 6.35 mm cable
- Female end connector with thread assures mating with its counterpart's coupling ring
- Water proof for marsh environment
- Gold plated pins & sockets assure positive electrical connections
- Screw fit mating
- Maximum strength in rugged field condition
- Fitted with dust cap
- Operating Temperature Range: -20°C to +70°C
- Water Pressure Rating: Up to 5 bar