



HGS (INDIA) LIMITED

32 Conductor ABEM Cable




158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED

SCHEMATIC

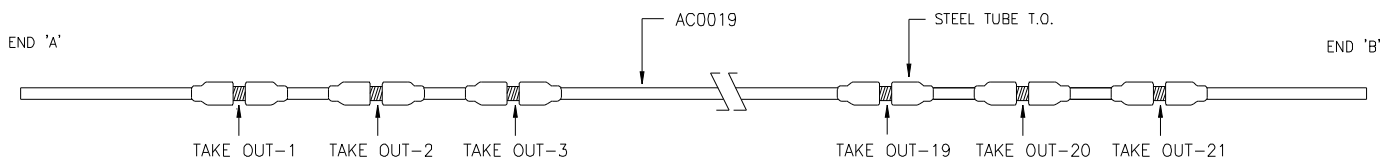

32 Conductor ABEM Cable

158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED

SPECIFICATIONS

32 Conductor ABEM Cable

- Customer specified resistivity cable.
- Used with ABEM system.
- Six copper and one steel wire for conductor.
- DC resistance < 290 ohms / km @ 20 C.
- Maximum OD: 8.35 mm.
- Break Strength > 100 kgf.
- Cable made as per customized requirements for takeouts and end connectors.
- Enough flexibility and strength for use in mobile field operations and frequent handling, transportation in form of coil etc.
- Excellent performance in rugged field conditions.
- Operating Temperature Range: -20°C to +70°C