



# HGS (INDIA) LIMITED

## HGS CDP Cable




158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA  
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845  
Email: [sales@hgsindia.com](mailto:sales@hgsindia.com)



# HGS (INDIA) LIMITED

## SCHEMATIC

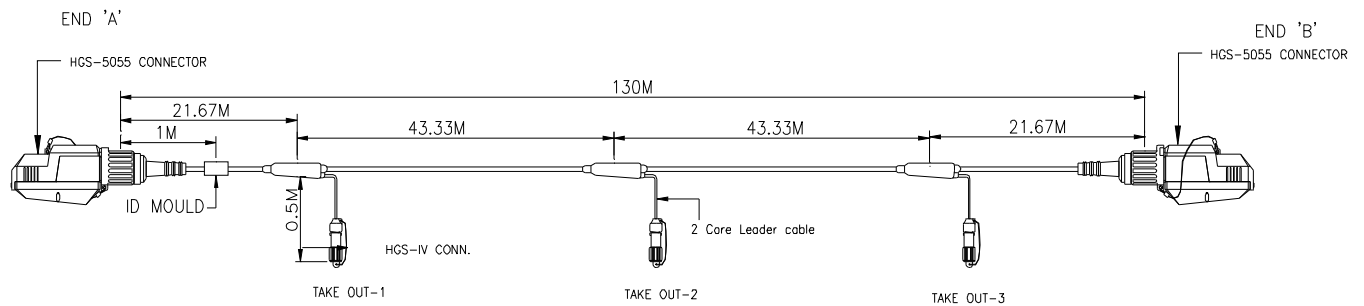

## HGS CDP Cable

158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA  
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845  
Email: sales@hgsindia.com



# HGS (INDIA) LIMITED

## SPECIFICATIONS

### HGS CDP Cable

- Pairs: 12 to 128 pairs.
- Conductor: 6 copper+1 steel.
- DC Resistance <290 ohms / km.
- Insulation Dia :  $0.65 \pm 0.04$  mm
- Outer Dia : 5 mm to 16 mm
- Excellent flexibility.
- Cable Sheathing using finest urethanes.
- Break Strength: 80 to 500 kgf.
- Maximum strength in rugged field conditions.
- Operating Temperature Range:  $-20^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$