



HGS (INDIA) LIMITED

HGS Shallow Refraction




158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED

SCHEMATIC

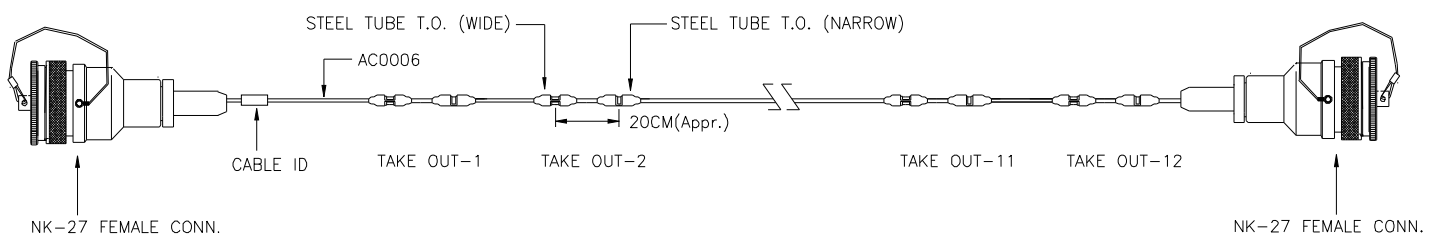

HGS Shallow Refraction with 12 take-outs

158, Sector-4, IMT Manesar, Gurgaon-122050 Haryana INDIA
Tel: +91 (0124) 4681800, Fax: +91 (0124) 4681845
Email: sales@hgsindia.com



HGS (INDIA) LIMITED

SPECIFICATIONS

HGS Shallow Refraction cable

- Pairs: 13 to 25 pairs.
- Conductor: 6 copper+1 steel.
- DC resistance < 290 ohms / km.
- Outer Dia : 5 mm to 9 mm
- Uses patented stainless waterproof moulded wide and narrow take-outs
- Excellent flexibility.
- Cable Sheathing using finest urethanes.
- Break Strength: 65 to 120 kgf.
- Maximum strength in rugged field conditions.
- Optional: Shallow refraction cable with conductor shielding also available.
- Operating Temperature Range: -20°C to +70°C