



HGS (INDIA) LIMITED



SPECIFICATION SHEET – GEOthree+ Digitizer

Low Power Digitizer – Recorder

- High resolution digitizer
- Four extra analog inputs
- Four TTL command lines
- Low power consumption
- 32 bit ADC
- Dimensions 168x106x68mm
- GNSS time/Precision DPLL
- 0.1-4000 samples per second
- 3+1 seismic channels
- Ultra-low noise preamplifier
- Embedded open source OS
- Embedded SeedLink server
- Embedded earthworm server
- Continuous/trigger recording
- Advanced networking functionality
- Smart seismic network operation



Geothree +

System Features

GEObit introduces GEOthree+ series high resolution 3+1 analog seismic channels telemetry digitizer/recorder. 32bits ADC converters provide effective resolution better than 23.9bits@100sps. The size of the instrument is only 168x106x68mm. The power consumption is only 1.1W for 4 channels. Available sampling rate is 1 to 4000sps, and optional 0.1 sps is supported. Build-in GNSS receiver combined with ultra-accurate DPLL unit providing time drift 10e-9 sec ensures timing stability even in the absence of GPS signal. NTP timing is also available. The unit is very flexible and accepts several types of analog front end units so any type of seismic sensor can be connected. Additionally, it provides extra four low resolution and rate analog inputs for seismometer mass position monitoring, or any other environmental parameter monitoring. Four TTL command outputs are supported for seismometer control or for any other external device control. Typically, the digitizer supports differential variable gain preamplifier. Our force-balance sensor front-end is also supported, providing a wide-band response (10sec-98Hz) and high sensitivity 1500V/m/s by connecting a C100 sensor. Acquisition parameters and operation modes can be set from the user-friendly web interface, up to 64 characters password protected.

Digitizer & SeedLink Stream Server

START STOP — Running — CLEAR BUFFER

Config

Station Name: Description:

Network ID: Description:

Filter Response: Remove DC:

Sensor Control: Enable GPS:

Digitizer Buffer: GPS cycle: min

MiniSEED packet: bytes AE Channels:

Active Channels: Location Code: Trigger Detection:

Channels 1-3

Gain: Sampling Rate 1: sps

Location: Sampling Rate 2:

Channel 1: Threshold 1 (abs): counts

Channel 2: Threshold 2 (abs): counts

Channel 3: Threshold 3 (abs): counts

Channel 4

Gain: Sampling Rate 1: sps

Location: Sampling Rate 2:


Channel 4: Threshold 4 (abs): counts

Export Raw Data Stream:

Publish Trigger to Network: Trigger Target:

Stream Archive

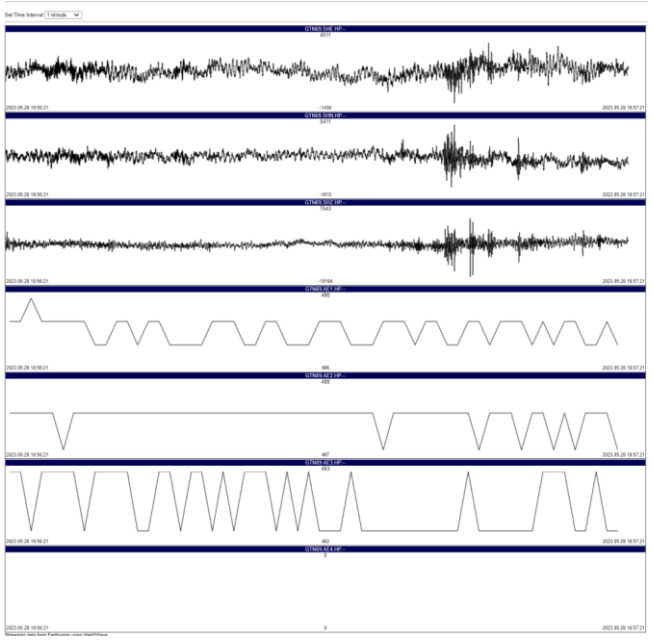

<p>The unit operates in continuous mode, triggered mode or both and data are streamed through different data ports. Local data storage is selectable as well as logfile information. The unit supports advanced functionality, implemented from the combination of trusted open source soft- ware components. Because of its open-source architecture is able to run any custom application thus providing the next day solution to the user.</p> <p>The hardware is based over an embedded ARM9 400MHz ARM Linux board, running 14.6 Linux kernel. The data are stored in mini-SEED format into the microSD card or to a removable USB stick. The instrument supports 10/100 ethernet port and debug port. FTP, SFTP, SSH are also available. The state of health is transmitted over UDP packets upon request.</p>	
--	--

GEOthree + Specifications:	
Digitizer	
Analog channels	3+1 high resolution seismic channels plus 4 auxiliary channels
Calibration Channel	One high resolution seismic channel (internally connected to calib signal - optional)
A/D converter	Fourth Generation, Delta-Sigma, 32bits data stream
THD	-125Db
Modulator	Fourth Generation, 4th order Delta-Sigma Modulator
Filter	Programmable SINC, FIR, IIR filtering, auto-calibration function
Filter Response	Selectable Minimum or Linear Phase Filter
Input resistance	1MOhm differential for variable gain input
Sampling Rate	1-1000sps, or 0.1-4000sps
Power	9-18Vdc or 9-36Vdc, 1.1W standalone, 1.3W telemetry
Dynamic Range	-142dB@100sps, -134db@1000sps
Analog Front-End	Modular Low noise preamplifier or wide- band sensor electronics
Time Base	
Type	GNSS receiver (GPS, GLONASS, WAAS,EGNOS,BeiDou,QZSS) /DPLL, GPS port, up to 30m cable GPS antenna or 120m active GPS antenna
Accuracy	+/-1usec to UTC time pulse, +/-5 meters to position
Timing Sources	Ultra-low drift DPLL unit using TCVCXO, RTC
DPLL drift	Less than 17usec between one hour GPS cycles
Communication	
Ports	Ethernet port, serial port, WiFi (station, AP, router)
Telemetry	Seedlink server 128 & 512 byte data blocks, earthworm server, SeisNetWatch



HGS (INDIA) LIMITED
 158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA
 Tel: +91 (0124) 4681800
 Email: sales@hgsindia.com | Website: www.hgsindia.com



Protocols	SSH, FTP, SFTP, Web Interface, TCP/IP, HTTP, HTTPS, PPP, MQTT, CoAP/CoAPS, NTP, PTP
Security	64 char password
LCD	Miniature LCD with altering information messages
LED	Two high brightness LEDs
Control - Calibration	
Control Signals	Seismometer Lock, Unlock, Center, Calib. Enable, active high/low user selectable
Calibration	Pulse, Sine waveform, variable amplitude, and frequency, 16bit DAC
Differential Input Frontend	
Input gain	40Vpp(x1), 20Vpp(x2), 10Vpp(x4), 5Vpp(x8), 2.5Vpp(x16), 1.25Vpp(x32), 0.625Vpp(x64) other options available
Sensitivity	1500V/m/sec using force-balance electronics
Physical (Digitiser/Recorder with Integrated Sensor Electronics)	
Size	168mmx106mmx68mm
Weight	0.85kg
Physical (10s seismic sensor if combined with sensor electronics)	
Type	Borehole Type/Surface Type
Dimensions	50mm diameter x 180mm length
Cable length	20meters, up to 100 meters
Weight	1.2kg
Humidity	Up to 20 bar external water pressure
Tilt	+/-10 degrees
ENVIRONMENT (DIGITIZER/RECORDER)	
Temperature range	-20 to +70 °C
Humidity	100%, IP67 enclosure

Ordering Information	
Item Description	HGS Part No.
Geothree + Digitizer	MK001135

Version 1.0



HGS (INDIA) LIMITED
 158, Sector-4, IMT Manesar, Gurugram-122050, Haryana, INDIA
 Tel: +91 (0124) 4681800
 Email: sales@hgsindia.com | Website: www.hgsindia.com

